



**Technical Data**

Standard	IEC 60051
Dielectric strength test	Frequency 50/60 Hz , Voltage 2000 V , duation 1 min
Impact Test	Maximum acceleration 147 m/s2
Response time	≤4 S
Angular Deflection	90
Temperature	-25°C ~+40°C
Humidity	25%~80% RH
Environment	No midew , insects , salt mist , dew , sand and dust are permitted
Installation	Installed vertically
IP GRADE	IP42




**Technical Data**

Rate Operation Current	2 - 32 A
Rate Operation Voltage	AC 380 V - 500 V
Rate Breaking Capacity	100 kA


Holder of fuse	Pole	Rate Current In (A)	Note	Weight (g)	Cat.No.	Packing	Price
HRT18-32X	1P	32	Material : Resin with Indicator	82	HRT1832ZXB	12/288	60.-
	2P				HRT1832ZXB	6/144	120.-
	3P				HRT1832Z3XB	4/96	180.-

TYPE	Accuracy Rating	Specification	Note	Diamention (mm.)	Cat.No.	Packing	Price
Ammeter	1.5	50/5 A	AC TYPE External Connection transformer	96 x 96 x 67.5	H96TA50	1/50	450.-
	100/5 A	H96TA100		1/50	450.-		
	150/5 A	H96TA150		1/50	450.-		
	200/5 A	H96TA200		1/50	450.-		
	250/5 A	H96TA250		1/50	450.-		
	300/5 A	H96TA300		1/50	450.-		
	400/5 A	H96TA400		1/50	450.-		
	600/5 A	H96TA600		1/50	450.-		
	800/5 A	H96TA800		1/50	450.-		
	1000/5 A	H96TA1000		1/50	450.-		
	1600/5 A	H96TA1600		1/50	450.-		
Voltmeter	500V	AC Type	96 x 96 x 67.5	H96L V5000	1/50	450.-	
			96 x 96 x 67.5	H96L V5000	1/50	450.-	
			96 x 96 x 67.5	H96L V5000	1/50	450.-	
			96 x 96 x 67.5	H96L V5000	1/50	450.-	


**Overall Dimensions**

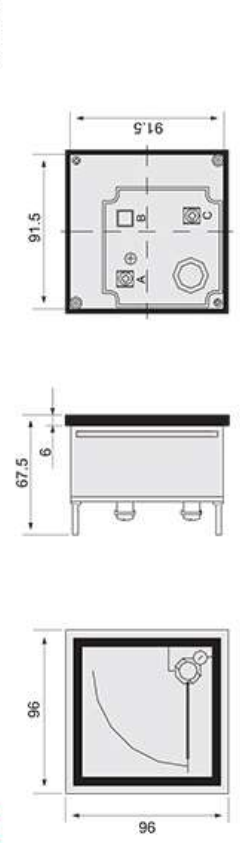

**Overall Dimensions**

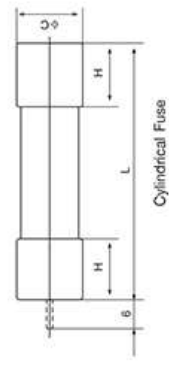

Type	Size	L	C	Hmax
HRT18-32	10x38	38±0.6	10.3±0.1	10.5

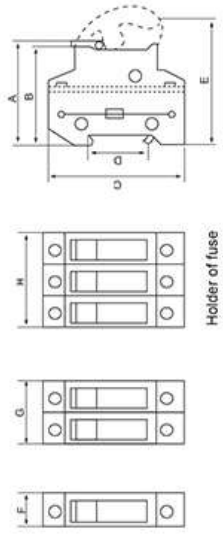

Type	A	B	C	D	E	F	G	H
HRT18-32	63	60	79	35	80	18	36	54