

Compact Enclosures Model DS



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Controlling waste water treatment system
Outdoor sport stadium

Protection Category

IP 45


Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Single door type

Specification

Material	Enclosure	Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Pre-treatment by zinc phosphate process Powder-coated in texture RAL 7032

DS Model Structure

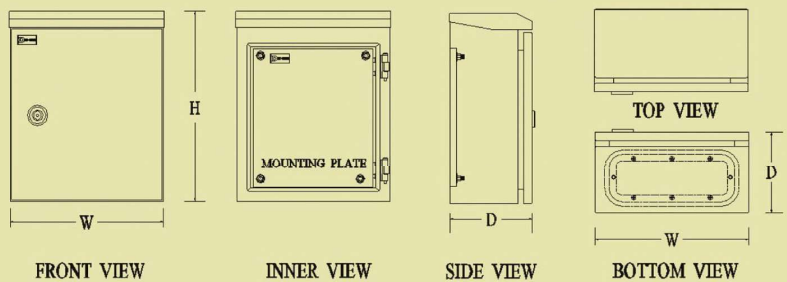

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DS-01	280	350	150	1,050
DS-02	300	450	150	1,170
DS-03	350	450	150	1,260
DS-04	300	450	200	1,290
DS-05	350	450	200	1,380
DS-06	350	500	200	1,550
DS-07	400	500	200	1,695
DS-08	450	600	200	1,780
DS-09	450	600	250	1,920
DS-10	500	600	200	2,100

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DS-11	500	600	250	2,250
DS-12	550	700	250	2,400
DS-13	630	750	250	2,750
DS-14	630	900	250	3,200
DS-15	600	1100	250	3,880
DS-16	700	1100	250	4,400
DS-17	800	1200	250	4,850
DS-18	900	1200	250	5,200
DS-19	800	1200	300	5,500
DS-20	900	1200	300	6,000