





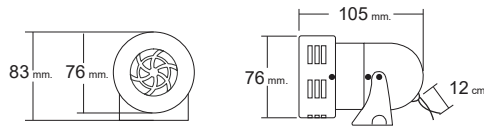



MS-190...VAC





MS-190...VDC



MS-290

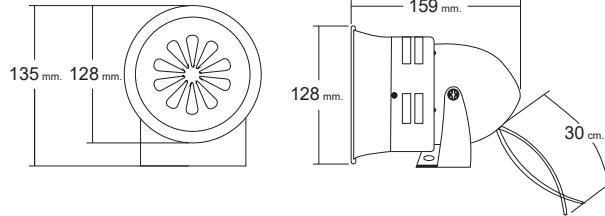

MS-390

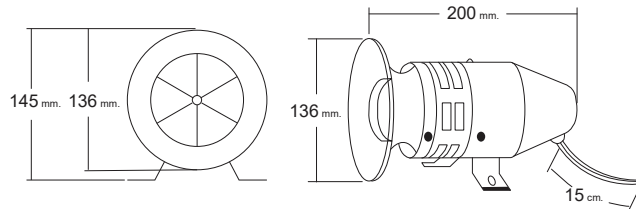

รุ่น (Model)	Rated Voltage	Frequency (Hz)	Rated Current	Power (W)	Sound Output dB(A) 1m	Continuous running time	Degree Of Protection	Material	สี (Color)	ราคา (฿)
MS-190	12 VDC	-	2.50A	3 W	100 dB	5-8 Min	IP 44	Steel	●	605.-
MS-190	24 VDC	-	1.55A	3 W	100 dB					605.-
MS-190	110 VAC	50/60	0.42A	45W	100 dB					605.-
MS-190	220 VAC	50/60	0.20A	45W	100 dB					605.-
MS-290	12 VDC	-	3.55A	45W	105 dB			Steel	●	990.-
MS-290	24 VDC	-	2.00A	45W	105 dB					990.-
MS-290	110 VAC	50/60	0.70A	75W	105 dB					990.-
MS-290	220 VAC	50/60	0.375A	80W	105 dB					990.-
MS-390	12 VDC	-	5.35A	6 W	115 dB	Aluminum and Steel	●	2,145.-		
MS-390	24 VDC	-	2.80A	68W	115 dB			2,145.-		
MS-390	110 VAC	50/60	1.33A	145W	115 dB			2,145.-		
MS-390	220 VAC	50/60	0.68A	150W	115 dB			2,145.-		

* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและราคาอาจเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า *