


ST : INSIDE-OUTSIDE STATION WIRE

APPLICATION :

For general use inside a telephone subscriber station.

STANDARD :

TOT/PDITL

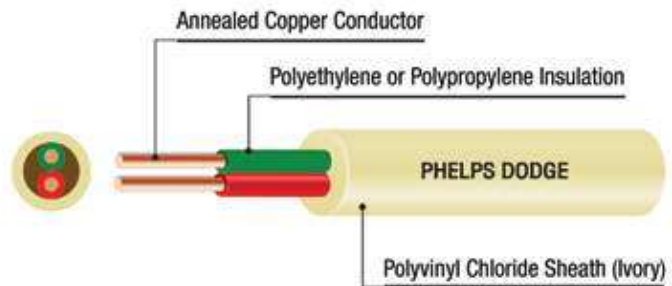

CONSTRUCTION :

Conductor	:	0.5 or 0.65 mm solid annealed copper
Insulation	:	Polypropylene or Polyethylene
Identification	:	2-core : Red and Green 4-core : Red, Green, Yellow and Black 6-core : Red, Green, Yellow, Black, White and Brown
Sheath	:	Polyvinyl Chloride (Ivory)

Conductor (mm)	Number of cores	Nominal insulation thickness (mm)	Nominal sheath thickness (mm)	Approximate overall diameter (mm)	Approximate cable weight (kg/km)	Standard length (m)
0.5	2	0.20	0.38	2.8	11	100/C
(24 AWG)	4	0.20	0.38	3.2	15	100/C
	6	0.20	0.38	3.8	21	100/C
0.65	2	0.25	0.38	3.3	16	100/C
(22 AWG)	4	0.25	0.38	3.7	23	100/C
	6	0.25	0.38	4.5	32	100/C

C = Packing in coil.